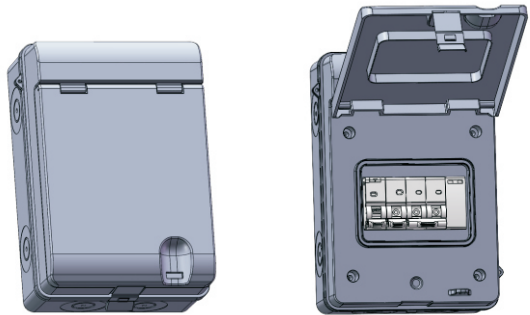


EVDB / 5 WAY Metal Enclosure with RCBO ,  
Type II SPD ,MCB and Isolator

General	
Product Image	
Enclosure Material	Metal-Powder Coated
IP Rating	IP66
RCBO	1PC
Surge Protection	1PC
MCB	1PC
Isolator	1PC
RCBO	
Rated Voltage	AC230V
Rated Current	B6A ~ B40A
Pole	1P+N (1 module)
Cable Selection	Flexible 4-10mm <sup>2</sup>
Tightening torque for terminals	2.0-3.0Nm
Surge Protection	
Test standard	IEC/EN 61643-11
SPD type	T2
Max. PV Operating Voltage (Uc)	275V AC
Nominal Discharge Current (8/20μs)	20kA
Max. Discharge Current (8/20μs)	40kA
Voltage protection level Up	≤1.5kV
Operating temperature	-5°C to +40°C

EVDB / 5 WAY Metal Enclosure with RCBO ,  
Type II SPD ,MCB and Isolator

MCB	
Pole	1P
Rated Voltage	230VAC
Maximum Current Carrying Capacity	B32A
Isolator	
Pole	2P
Rated Voltage	230VAC
Maximum Current Carrying Capacity	125A

Outline Dimension Drawing

