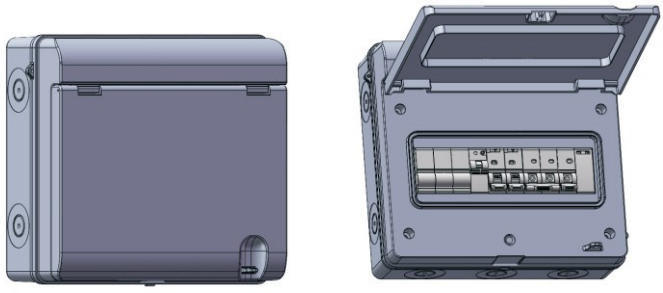


General	
Product Image	
Enclosure Material	Metal-Powder Coated
IP Rating	IP66
RCBO	2PCS
RCBO (Type:B)	1PCS
Surge Protection	1PC
MCB	1PC
Isolator	1PC
Blanking Module	3PCS
RCBO	
Rated Voltage	AC230V
Rated Current	B6A-B40A
Pole	1P+N (1 module)
Cable Selection	Flexible 4-10 ^{mm} ₂
Tightening torque for terminals	2.0-3.0Nm
Type B RCBO	
Rated Voltage	AC230V
Rated Current	B6A-B40A
Pole	1P+N (1 module)
Minimum detection capability	up to 20kHz
Minimum trip threshold above 1kHz	300mA
Surge Protection	
Test standard	IEC/EN 61643-11

SPD type	T2
Surge Protection	
Max. PV Operating Voltage (Uc)	275V AC
Nominal Discharge Current (8/20μs)	20kA
Max. Discharge Current (8/20μs)	40kA
Voltage protection level Up	≤1.5kV
Operating temperature	-5°C to +40°C

MCB	
Pole	1P
Rated Voltage	230VAC
Maximum Current Carrying Capacity	B32A

Isolator	
Pole	2P
Rated Voltage	230/240VAC
Maximum Current Carrying Capacity	100A

Outline Dimension Drawing

