

RAYSTECH

Battery



Raystech App User Guide



App Download

Download the app in App Store or scan the QR Code.

- ✓ Android system, search for "Raystech" in the Google Play Store
- ✓ IOS system, search for "Raystech Energy" in Apple App Store

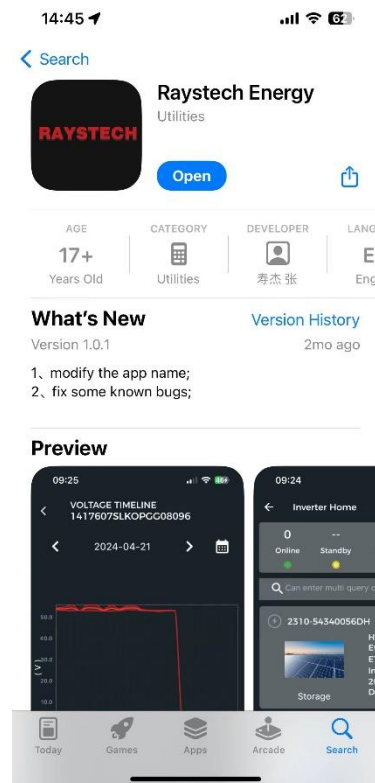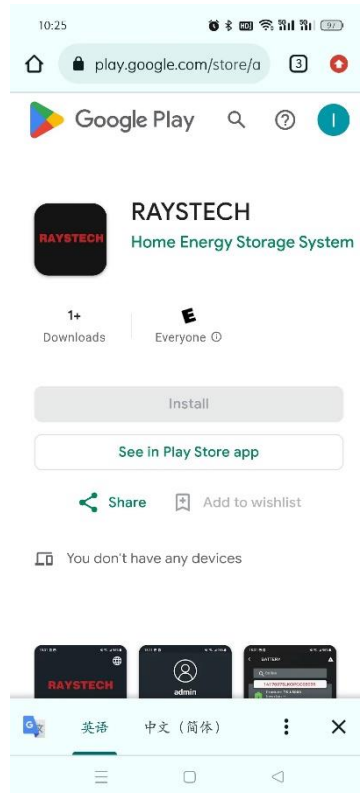


Google Play (Android)



App Store (IOS)





User Registration

- ① Open the app and select “Sign up”.
- ② Scan the device barcode or Enter Device SN (Displayed on the side of the device).
- ③ Input inverter details and fill out user information on the following pages.
- ④ Click ‘Submit’. You can then receive a registration success message.

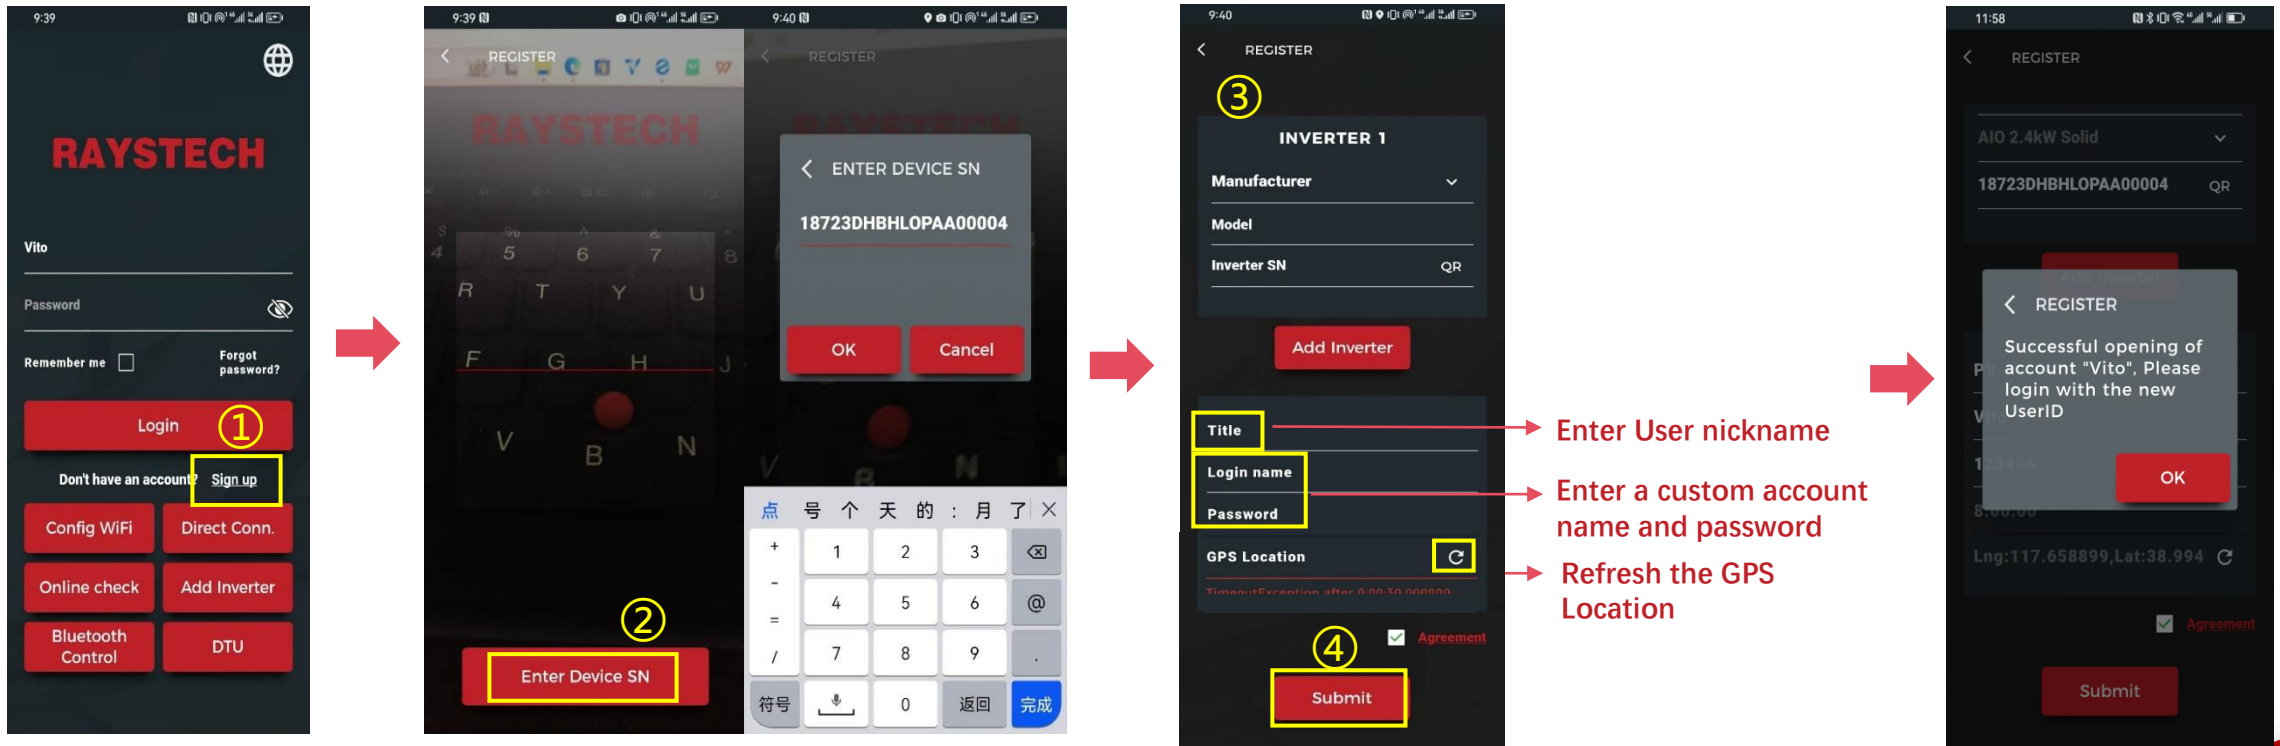

How to increase battery?

- ① Login account
- ② Choose 'battery'. You can view battery information. Click ⊕ to add battery. The method for adding batteries is the same as when registering.

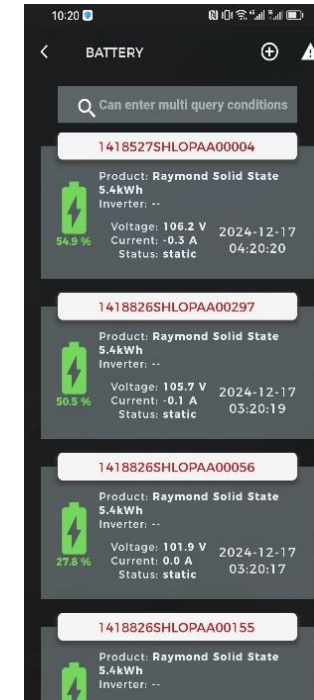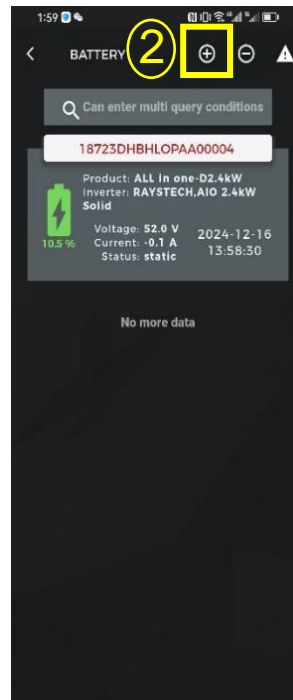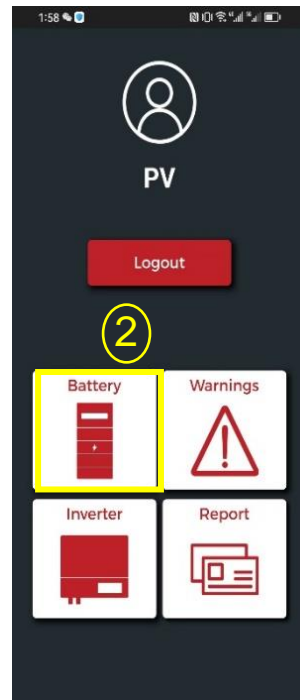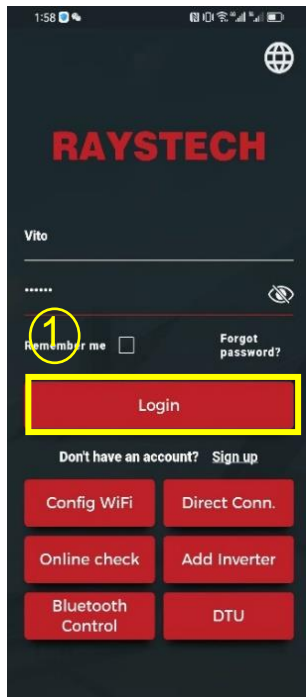


Configure Network


WiFi only supports 2.4GHz! Not supporting 5GHz WiFi.




Click 'Config WiFi'

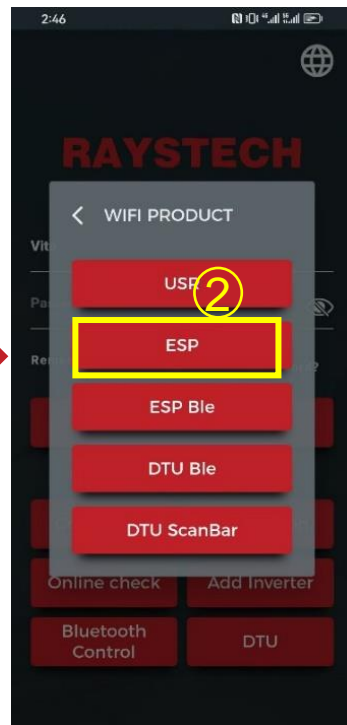


Click 'ESP Ble'

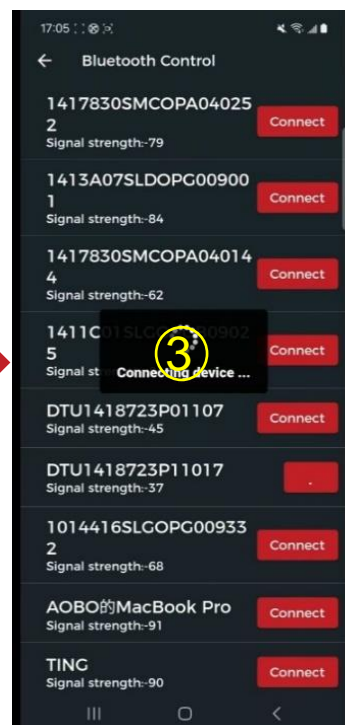

Displayed batteries

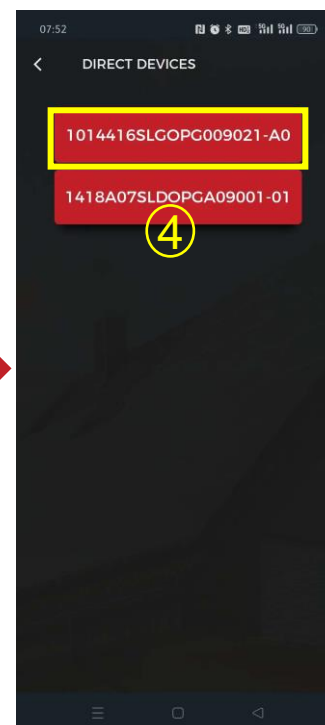


Select the battery

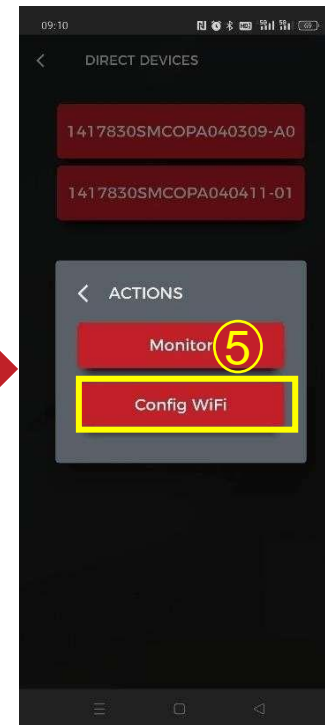

Click 'Config WiFi'

next page...

Configure Network

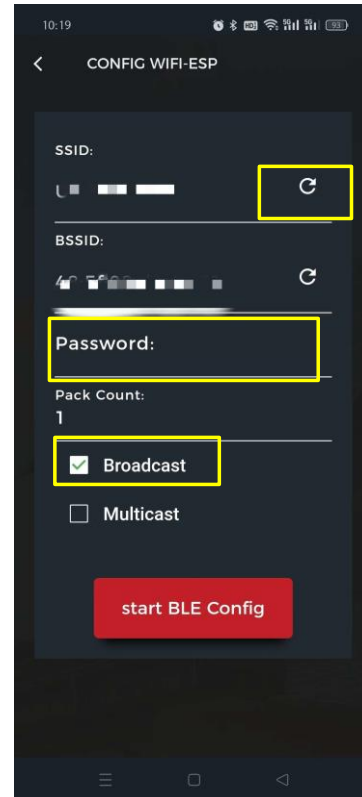

1. Refresh the SSID of the network.

2. Enter the local WiFi password.

3. Select "Broadcast"

4. Click "Start BLE Config"

5. After completing the above steps, a message will appear indicating that the network configuration is complete.

Thank you

Raystech ESS
Safeguarding Your Power Needs

RAYSTECH (TIANJIN) PV ENERGY CO., LTD.

Service center

service@raystechgroup.com

+86 (0) 22-59901199